DATA SHEET

PowerHeat B.V. **P**






TopStart 4-12 kW

The TopStart is an electric coolant heater for all types of water-cooled engines. It is universal, reliable, easy to install, and maintenance free.

The 4-12 kW heaters are suited for large industrial engines in both stationary (generator sets) and mobile applications (generator sets, diesel locomotives). The heater can be put into service a few hours before starting the engine, in order to keep the engine permanently at the required temperature. This ensures an easy full power start whatever the ambient temperature and avoids cold start mechanical damage.

Heating unit	Circulating pump	Heating element
 Die casted aluminum body PA66 protection covers and support base 150 cm power cable 3/4" water outlet and inlet + connection kit 	 Flooded rotor pump Max. flowrate: 1.6 to 2m³/h to 3m height manometer Adjustable speed Available voltage: 120V or 230V Available frequencies: 50 Hz or 60 Hz 	 Low watt density heating element made of Incoloy 800 (7,5W / cm²) which increases its lifetime and those of the coolant Available powers: 4 Kw - 12 Kw Available voltages: 230V / 400V / 440V / 480V / 690V
Safety thermostat	Water temperature control thermostat	Option: control terminal – available voltages
 Security thermostat with manual reset, rated 25A, 6.000 cycles (110 °C / 230°F) 	 Adjustable thermostat 0°C - 80°C rated 25A, 100.000 cycles Available temperature interval: 0°C - 80°C (32°F - 176°F) 	 3*400 V → 3*480V 3*400V + N, 1*230V 3*600V

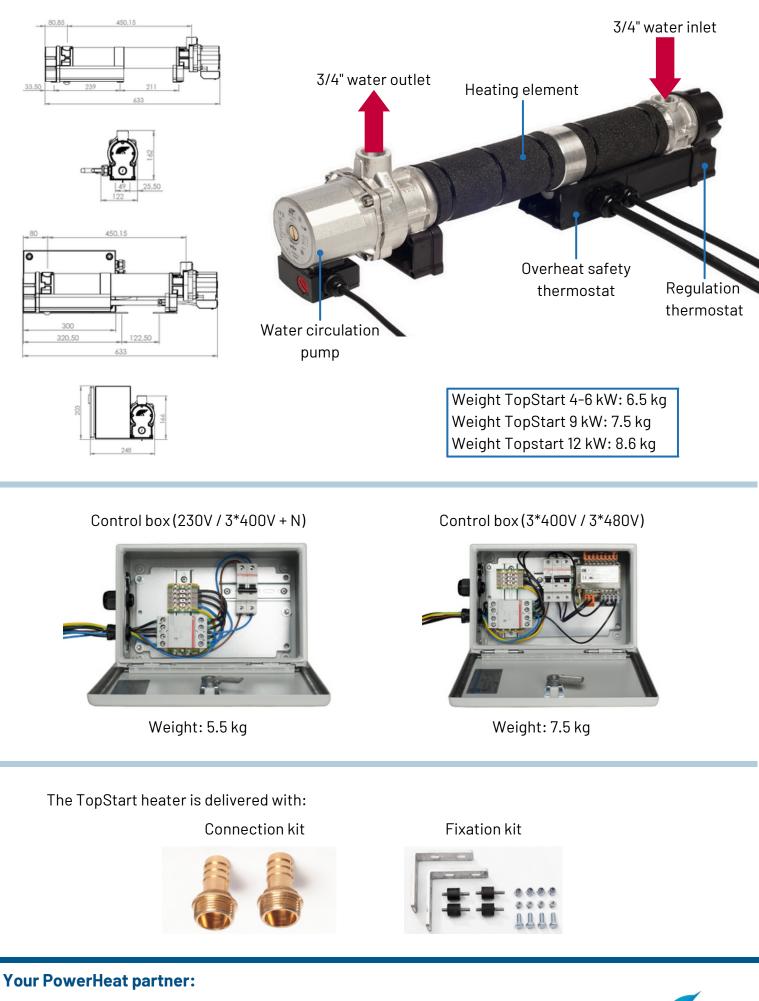

GenHeat Unit 21 Park Farm Business Park Skeffington Leicestershire, LE7 9FN

+44 (0)1664 668 599 sales@genheat.co.uk www.genheat.co.uk GENHEAT